ENFORCER® Access

# Electromagnetic Lock with Weldable Brackets for Gates

- **Weld or Bolt to Gate**
- **4 Knockouts on Junction Box**
- **Corrosion-Resistant Finish**
- **Water and Vandal Resistant**

## E-942FC-1K3SQ

*Electromagnetic Lock with brackets for armature and magnet.*

## E-942FC-1300

*Electromagnetic Lock only.*

## Features:

- For outdoor sliding and swinging electric gates.
- Brackets can be welded or bolted directly to gate.
- Brackets are zinc-plated for corrosion resistance.
- Brackets have black finish to match most gates.
- Lock is water and vandal resistant.
- Lock has attractive stainless-steel finish.
- Maintenance-free, factory-sealed design.
- Holding force - 1,300 pounds.
- Prewired for 12VDC operation.
- Adapter and mounting hardware included.

## Technical Specifications:

| | E-942FC-1K3SQ |
|---|---|
| Operating Voltage | 12VDC or 24VDC |
| Holding Force | 1,300 lb. (591 kg) |
| Current Draw | 500mA/12V, 250mA/24V |
| Weight (Approx.)<br>Total<br>Maglock & Armature Bracket | <br>15.6 lbs. (7.1 kg)<br>11 lbs. (5.0 kg)<br>4.6 lbs. (2.1 kg) |
| Certifications | CE<br>(magnetic lock only) |

## Dimensions:

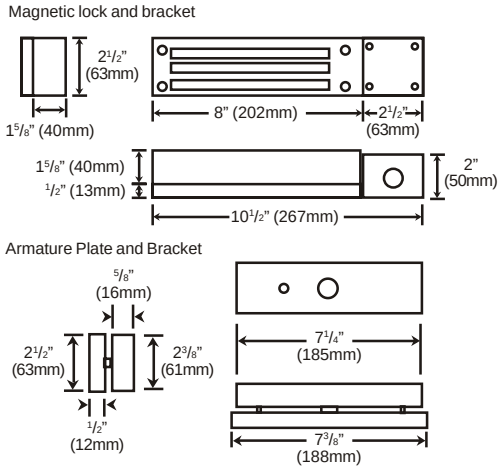


## Installation:

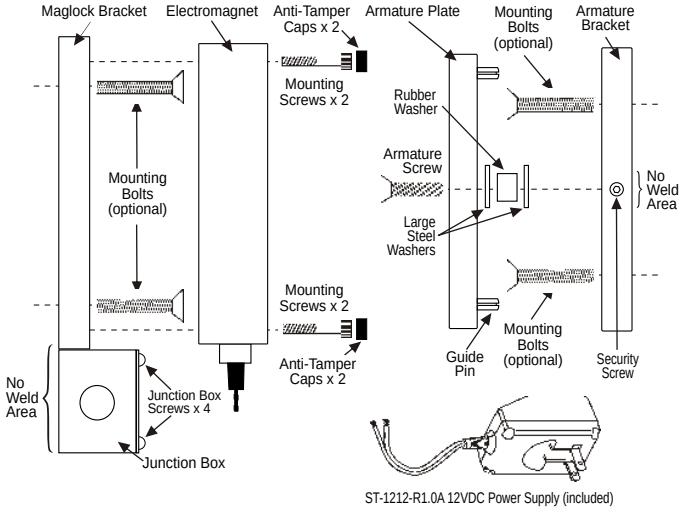


Copyright 2007 SECO-LARM U.S.A., Inc. All rights reserved.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**SECO-LARM®**
16842 Millikan Avenue, Irvine, CA 92606
1.949.261.2999 (CA & Int'l) 1.800.662.0800 Fax: 1.949.261.7326
Email: info@seco-larm.com Website: www.seco-larm.com